

NOW
iSCSI 10GbE Ports!

JetStor® SAS 616iS

HIGH PERFORMANCE 10Gbit iSCSI RAID WITH DUAL CONTROLLERS



FEATURES

Combining the deployment convenience of iSCSI with outstanding JetStor performance, the JetStor SAS 616iS 10G sixteen bay RAID array reliably delivers full 10 gigabit Ethernet throughput from each of the two channels to 32 terabytes of storage. This remarkable performance eliminates bottlenecks in your most demanding applications, diminishing response times for increased productivity. A high performance 64 bit Intel Xscale dual-core processor with hardware-embedded RAID 5 and RAID 6 optimization achieves up to 12 GB/sec internal bandwidth. Designed for mission critical applications, the JetStor's data protection is backed by high availability features such proactive event monitoring software, on-line RAID set integrity verification, and a cableless intelligent backplane that enables hot-swapping of redundant power supplies, power connections and cooling fans.

NON-STOP ADS AVAILABILITY

JetStor storage systems are engineered for non-stop operations. Capacity can be increased and drives replaced as data remains on-line. Multiple drives may be designated as hot-spares, allowing the JetStor to transparently move data to a spare should an error be detected. RAID 6 with Advanced Data Sentry technology allows for continuous operations even with two simultaneous drive failures. Considering that RAID 6 ADS provides 1,000 times greater data protection than RAID 5, why trust your data to an older technology?

ADVANCED iSCSI SUPPORT

The JetStor SAS 616iS 10G implements all IP SAN standard and advanced features, including volume sharing with up to 32 hosts, host access control and CHAP. Full multi-channel capabilities include 802.3ad port trunking, multi-homing, active/passive LACP and Microsoft MPIO. The iSCSI offload engine further features updatable firmware to support future protocol changes.

- Up to 1250 MB/sec performance full-duplex 10Gbit Ethernet to support your most demanding applications.
- Complete advanced iSCSI support including volume sharing, host access control and CHAP.
- Dual-redundant controllers insure uninterrupted data availability.
- RAID Manager browser based GUI management and monitoring software allows you to remotely configure and manage all JetStor systems with e-mail event notification.
- Integrated Snapshot allows for automatic scheduled or ad hoc backups.
- Supports all Operating Systems, both single and clustered.
- Field-replaceable major components allow for maximum convenience, uptime and configuration flexibility.
- Outstanding Warranty of five years on disk drives and three years on all other components. Optional advanced replacement program ships drive replacements within 24 hours. Optional on-site service also available.
- Free telephone & email support is provided for the life of the unit.



www.raid.com
800-213-2667



JetStor SAS 616iS 10G

SPECIFICATIONS			
Number of Bays / Size Maximum Capacity ¹	16 SAS/SATA bays / 3U 32TB	iSCSI Acceleration and Advanced Functionality	Optimally integrated as tasks performed by the powerful dual-core processor. Load balancing, 802.3ad trunking, failover, LACP
Controllers	Dual-redundant mirrored cache		
Processor	64-bit Intel Xscale IOP342 Dual-core Storage Processor	Network Controller	TCP Offload Engine (TOE)
Backplane Interface	133 MHz PCI-X	Management Ports	Two DB9 RS/232 RJ45 Ethernet
Internal Bandwidth	Up to 3.2 Gb/s	Power Supplies	Two Redundant 460W Two Power Connections
Disk Bus Interface	Sixteen 3 Gb SAS/SATA II channels 48-bit addressing	Cooling Blowers	Dual Redundant Hot-Swappable
Cache (ECC supported)	2 or 4 GB (1 DDR333 ECC SDRAM)	Battery Backup	Optional, 72 Hour Hot Pluggable
OPERATING SYSTEMS			
Windows Server 2003 and 2008, VMWare ESX Server, vSphere, and others to be announced			
¹ Maximum storage capacities are calculated with 2TB SATA drives. Drive support not limited to drive capacities listed, all future drive capacities supported when available. All features, hardware and software performance specifications are subject to change without notice.			



Ergonomically designed drive trays allow for safe on-line replacement or expansion with any SAS or SATA disk drive.



Redundant, hot-swappable RAID Controllers.

Redundant, hot-swappable power supplies with integrated cooling and two power connections.

Ethernet port for Web GUI, remote monitoring, configuration and email event notification.


Two 10 Gigabit Ethernet ports for 1250MB/s bandwidth or clustered shared storage per controller.



Front panel display and controls allow for complete unit configuration, as well as instant visual system status.

FEATURES:

- Extensive configuration options allow one or many Virtual Disk assignments to one or many specific Ethernet ports, and specific or shared cache settings for each Virtual Disk
- Supports RAID levels 0, 1, 0+1, 3, 5, **6 with ADS**, 10, 30, 50 and 60, JBOD, global hot spares and automatic online rebuild
- Array roaming allows you to easily transfer complete RAID sets with their configuration data to another RAID system
- Allows online migration and capacity expansion within the enclosure
- Local audible event notification alarm
- Built-in ethernet port for remote event notification, Web GUI, configuration and management
- Two host channels per controller support clustered environments, MPIO
- Tagged command queuing for 255 commands allows for overlapping data streams
- RAID Advanced Data Sentry (ADS) provides the highest level of data protection by tolerating multiple simultaneous drive failures without downtime or data loss
- RAID ADS probability of data loss is 1/1,000 that of an equivalent RAID 5 array

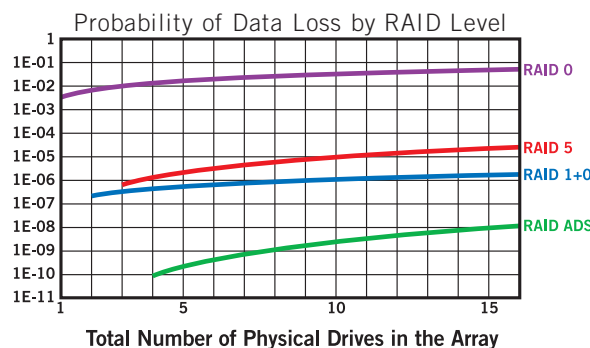

www.raid.com
800-213-2667

ADVANCED COMPUTER & NETWORK CORPORATION
5001 Baum Boulevard, Suite 680 • Pittsburgh, PA 15213
tel: 800.213.2667 • 412.683.9010 • fax: 412.683.9070

TECHNICAL SUPPORT: 888.686.2262

EUROPE:+44 (0)1628 891616

GSA Schedule GS-35F-0694J • CMAS# 3-00-70-1230A